


INLINE 125 QM MOTOR FABRIC UNWINDS FRONT




Dimensions of the Projection Screen

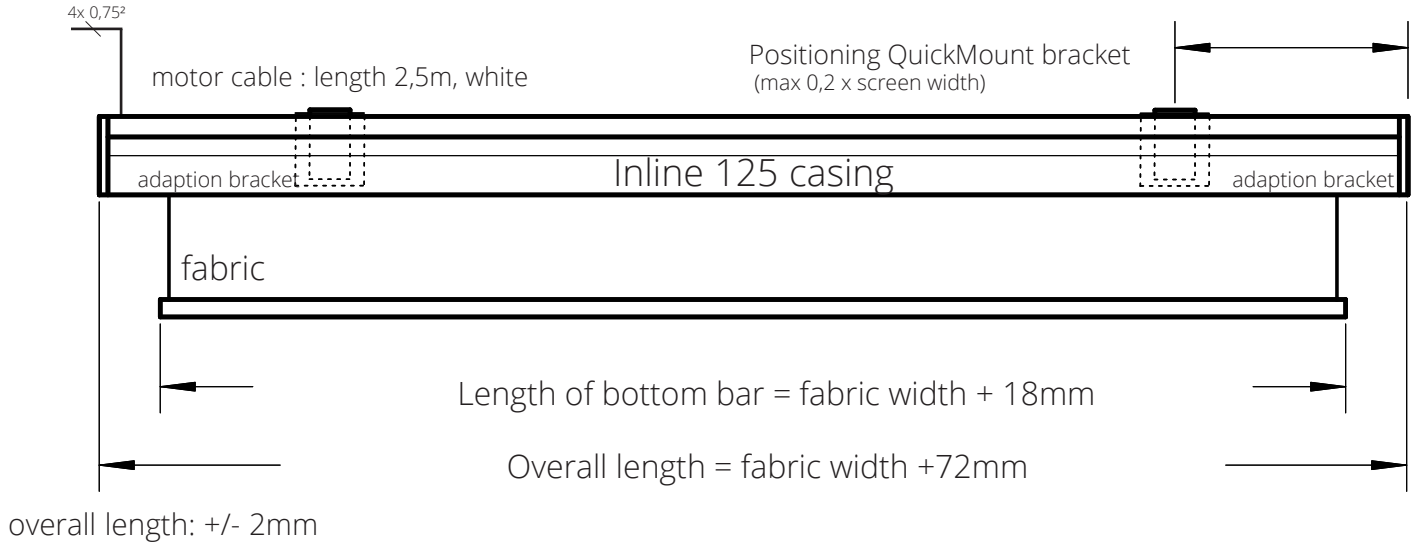


The QuickMount-brackets can be fixed within the mounting area (0,2x casing length) at any position on wall or ceiling. The adaption bracket have to be mounted according to the QuickMount positioning on top of the casing by clamp bars and 6 screws each. The projection screen can be hooked onto the QuickMount brackets via these adaption brackets and secured.

Cross-section Inline-QuickMount

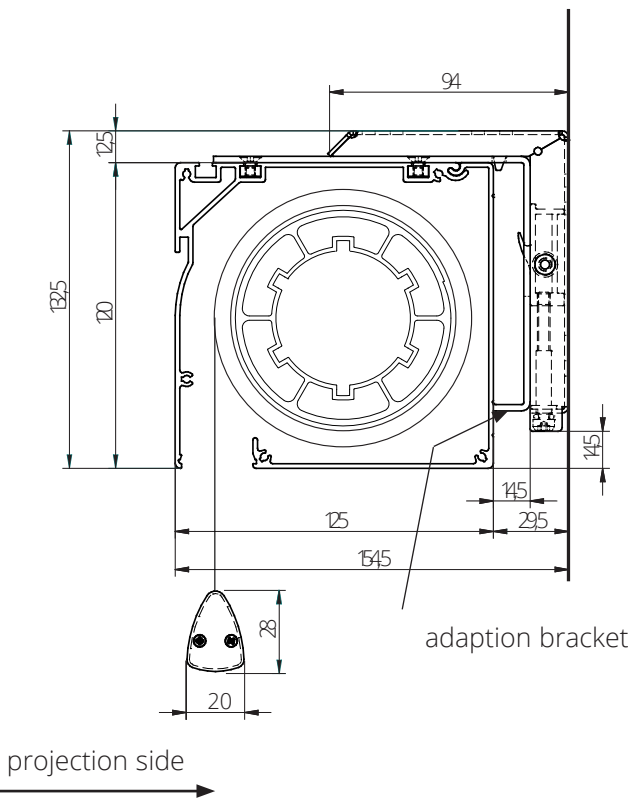

QuickMount Bracket

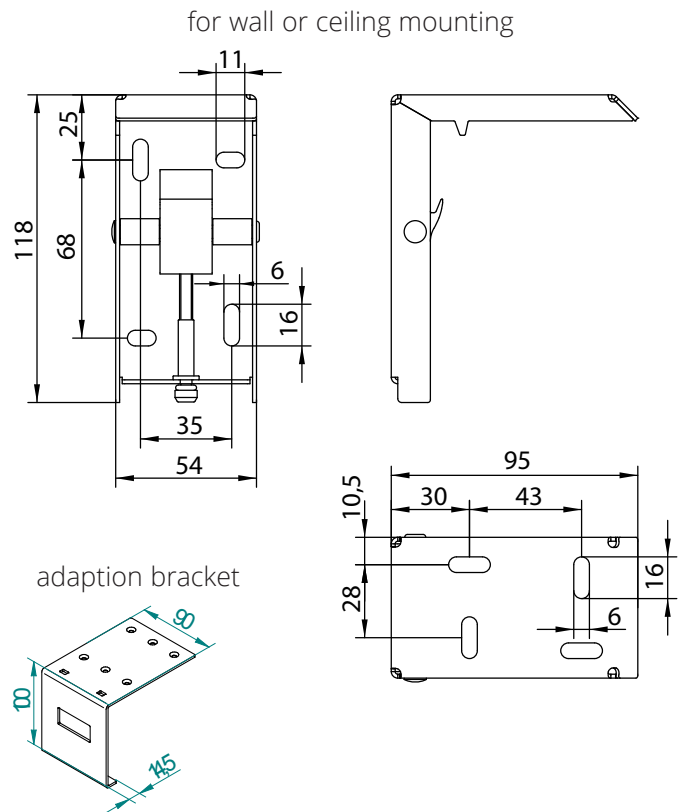

Version: 11/17